

CLASSIC-V VS. SUPER-V:

What's the difference? We've drawn on decades of rack mount case experience to produce two tiers

The Peli-Hardigg™ Classic-V Series has a 33" (838 mm) depth frame

of performance.

and has longer shock mounts and a larger sway space between the rack and shell. This case also has 4 removable heavy-duty casters and stainless steel handles. Extra insurance if your equipment frequently ships via freight services.

The Peli-Hardigg[™] Super-V Series has a 24" (610 mm) deep frame and uses shorter shock mounts for compact case dimensions. This case uses edge casters - just grab the Comfort-Grip Handles and you're ready to roll.

33" CLASSIC-V RACK MOUNT CASE

retractable handles heavy duty bottom

Stainless steel

All Peli-Hardigg™ Classic-V and Super-V Series are rated for equipment loads up to 77 kg. Mating columnar ribs create a rigid shell and also provide secure stacking of same-size cases.



SHARED FEATURES

You'll also find a manual purge valve, so air pressure in the case can be equalised to the atmosphere. This prevents vacuum-lock that can make opening the case difficult. Lids include a fully sealed

O-ring gasket that works with the purge valve to make the case fully watertight.

These features may seem extraordinary, but we've learned that water and electronics don't mix.

Look for detailed dimensions and features on the following pages and on Peli.com/racks

TO SEE THE FULL LINE OF RACK MOUNT CASES **GO TO: PELI.COM/RACKS**









Classic Rack

Part. No. 0030-006-900E MAR. 16

Mac Rack™

ProRack™




PELI 1 YEAR LIMITED GUARANTEE

Peli Products, S.L.U. ("Peli") guarantees its rotationally moulded containers will be free of defects in materials and workmanship for a period of one year from the date of purchase. This warranty does not cover any associated hardware including closure hardware, retractable handles, wheels, and fasteners, which Peli warrants against defects in materials and workmanship for a period of 90 days from the date of purchase. This warranty applies only to the original purchaser and is not transferable. To the extent permitted by law: Peli's liability is limited to the case and not its contents. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.


For complete warranty details, see www.peli.com/warranty

24" SUPER-V

RACK MOUNT CASE







©2016 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsisiaries and/or affiliates

PELI PRODUCTS, S.L.U. C/ Provença, 388 Planta 7 • 08025 • Barcelona, Spain Tel +34 934 674 999 • Fax +34 934 877 393



NEW PELI-HARDIGG™ V-SERIES RACK MOUNT CASES

IN STOCK **AND READY TO** ROCK



THE OFF-THE-SHELF RACK MOUNT **CASE WITH PRO-GRADE FEATURES.**

Gearing up for an event? Now you can get pro-grade rack mount cases straight away. The Peli-Hardigg V-Series Cases are the perfect companion for the music, AV, entertainment, news and drones industry.

Peli-Hardigg[™]



threaded mount. We even ship the case with your choice of 10-32 Imperial or M6 Metric clip-nuts.

VIBRATION IS YOUR ENEMY.


Drops and impact are an obvious no-no with electronics, but vibration puts damaging repetitive stress on delicate parts and soldered joints. That's why you'll find 8 heavy duty rubber shock

mounts to isolate the frame inside the shell. The polymer outer shell absorbs impacts, and the shock mount inside dissipates residual movement. Rack mount cases without shock mounts transfer impact forces directly to the electronics inside.









the clip nut onto a square

hole and you've got a secure,

STAINLESS

STEEL HANDLES

LOCKING CABLE

CATCHES

FOR ULTRA FRAGILE EQUIPMENT

HEAVY-DUTY

CASTERS

to case while case is open **B:** MOLDED-IN STACKING RIBS

Secure non-slip stacking on matched size cases

C: DOUBLE WALLED RIM FOR TONGUE-IN-GROOVE SEAL

Remains sealed after impact, splash, rain, air and watertight resistant

D: POSITIVE ANTI-SHEAR LOCKS Prevents lid separation upon impact E: BLACK HARDWARE

Non-reflective black hardware eliminates glare in bright environments

F: COUPLING CATCHES Attaching system for secure stacking

G: PRESSURE RELEASE VALVE Regulates air pressure

extra columnar strength

Moulded-in-in ribs provide

H: COLUMNAR STRENGTH

I: REINFORCED **CORNERS AND EDGES**

15% to 20% Thicker corners and edges for added impact protection J: SHOCK MOUNTS

Shock mounts provide excellent shock and vibration cushion for delicate equipment

K: RECESSED HARDWARE Hardware protected from

impact, and snag free transport

METAL INSERTS Catch and hinge attachment points distribute load to case walls

L: SQUARE HOLE

M: PATENTED

19" RACK FRAME (WIDTH)


for universal equipment fit


Fixed square hole frame

PELI-HARDIGG™

24" SUPER-V RACK MOUNT CASE

FOR MODERATELY FRAGILE EQUIPMENT

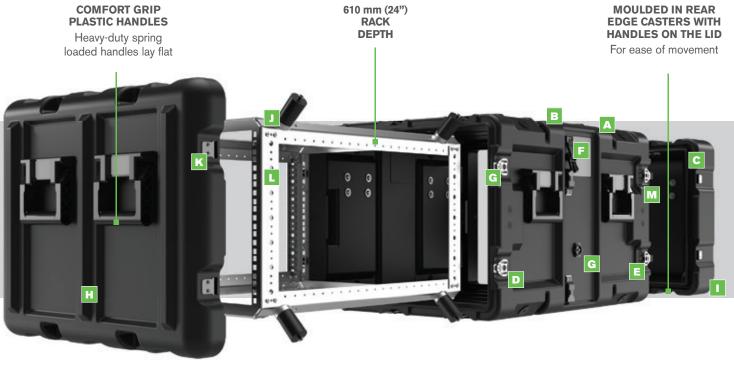

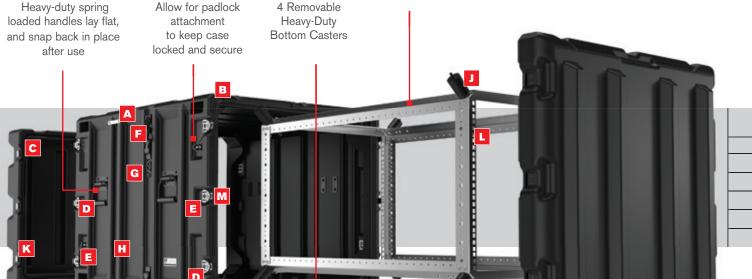


838 mm (33")

RACK DEPTH


	RACK HEIGHT U SIZE		RACK LENGTH		RACK WIDTH		LID I.D. FRONT/BACK ¹	LENGTH O.D. ²		WIDTH O.D.		HEIGHT O.D. ³		WEIGHT		SHIPPING CUBE		
CAT NO.	U	in	mm	in	mm	in	mm	in	in	mm	in	mm	in	mm	lbs	kg	ft3	m3
CLASSIC-V-3U	3U	5.25	133	33	838	19	483	2.5 / 5.25	45.8	1163	27.0	686	12.3	311	51.0	23.1	8.8	0.25
CLASSIC-V-4U	4U	7.00	178	33	838	19	483	2.5 / 5.25	45.8	1163	27.0	686	14.6	371	54.0	24.5	10.5	0.30
CLASSIC-V-5U	5U	8.75	222	33	838	19	483	2.5 / 5.25	45.8	1163	27.0	686	16.6	422	56.0	25.4	11.9	0.37
CLASSIC-V-7U	7U	12.25	311	33	838	19	483	2.5 / 5.25	45.8	1163	27.0	686	20.6	524	65.0	29.5	14.7	0.42
CLASSIC-V-9U	90	15.75	400	33	838	19	483	2.5 / 5.25	45.8	1163	27.0	686	24.3	616	72.0	32.7	17.4	0.49

	RACK HEIGHT U SIZE		RACK LENGTH		RACK WIDTH		LID I.D. FRONT/BACK ¹	LENGTH O.D. ²		WIDTH O.D.#		HEIGHT O.D. ³		WEIGHT		SHIPPING CUBE		
CAT NO.	U	in	mm	in	mm	in	mm	in	in	mm	in	mm	in	mm	lbs	kg	ft3	m3
SUPER-V-3U	3U	5.25	133	24	610	19	483	2.2 / 5.2	38.5	978	28.3	603	11.4	289	50	22.7	6.0	0.17
SUPER-V-4U	4U	7.00	178	24	610	19	483	2.2 / 5.2	38.5	978	28.3	603	13.1	333	53	24.0	6.9	0.20
SUPER-V-5U	5U	8.75	222	24	610	19	483	2.2 / 5.2	38.5	978	28.3	603	14.9	378	55	24.9	7.9	0.22
SUPER-V-7U	7U	12.25	311	24	610	19	483	2.2 / 5.2	38.5	978	28.3	603	18.4	467	60	27.2	9.7	0.28
SUPER-V-9U	9U	15.75	400	24	610	19	483	2.2 / 5.2	38.5	978	28.3	603	21.9	556	64	29.0	11.6	0.33
SUPER-V-11U	11U	19.25	489	24	610	19	483	2.2 / 5.2	38.5	978	28.3	603	25.4	644	69	31.3	13.4	0.38
SUPER-V-14U	14U	24.50	622	24	610	19	483	2.2 / 5.2	38.5	978	28.3	603	30.6	778	74	33.6	16.2	0.46

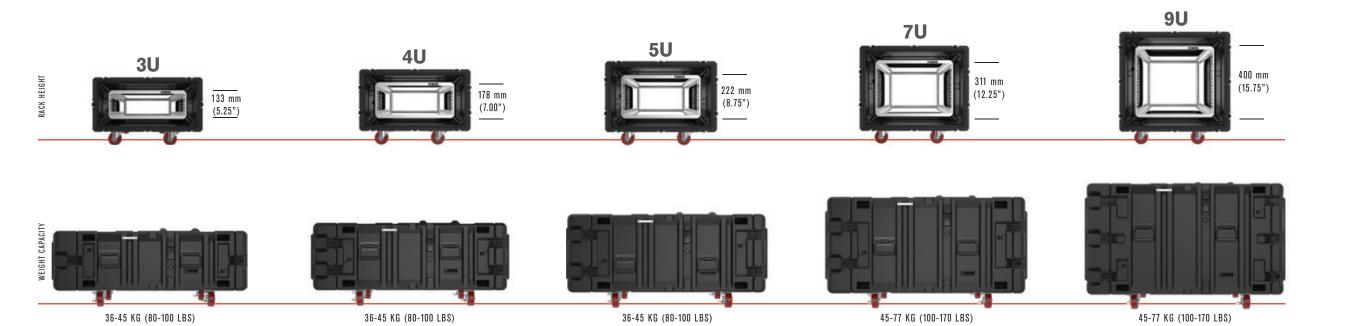

PELI-HARDIGG™ 33" CLASSIC-V RACK MOUNT CASES



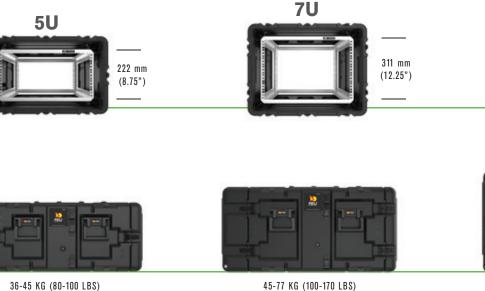

PELI-HARDIGG™ 24" SUPER-V RACK MOUNT CASES



45-77 KG (100-170 LBS)





(24.50")