



## Certificate of Test Compliance

**Worked Performed For:**

**Pelican Products**  
23215 Early Ave.  
Tustin, CA 90505

**Job No. 10549**

**Contract No. N/A**

**Purchase Order No. 4500227195**

**Date 9/24/2021**

### Dry Heat Test

**Test Requirements:**

Kelly Space & Technology Inc. certifies that the Case, Part No. 1556 - 23.43" x 13.56" x 10.57" was subjected to Dry Heat per DEF STAN 81-41 Part 3/4 par. 14 & 17.

**Pre-Conditioning:**

Temperature:  $25^{\circ}\text{C} \pm 10^{\circ}\text{C}$

Humidity:  $60\% \pm 15\%$

Duration: 16 hours or until specimen has reached temperature stabilization (whichever is the shortest period)

The testing was completely and correctly performed in accordance with DEF STAN 81-41 Part 3/4 par. 14 & 17 specifications. Complete test results are documented in Kelly Space & Technology, Inc. Test Report No. 10549.

**Test Summary:**

Place the test specimen in a test chamber on the face on which it normally is expected to be transported or stored. Install a thermocouple on the test specimen. Maintain the chamber at  $25^{\circ}\text{C} \pm 10^{\circ}\text{C}$  and  $60\% \pm 15\%$  relative humidity for 16 hours or until the specimen has reached temperature stabilization (test specimen temperature within tolerance of the chamber temperature ).

Increase the chamber temperature to  $71^{\circ}\text{C} \pm 2^{\circ}\text{C}$  at rate not to exceed  $3^{\circ}\text{C}$  per minute. Humidity is not to exceed 75%. Maintain the chamber at these conditions for  $48 \pm 1$  hour.

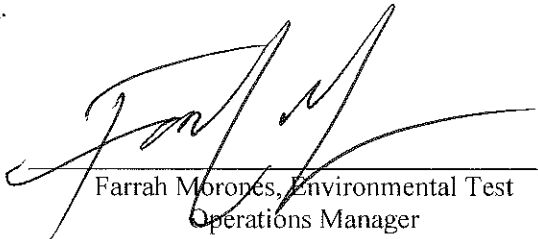
Return the chamber temperature to ambient conditions at a rate not to exceed  $3^{\circ}\text{C}$  per minute. Perform a visual examination and document all results.

All testing was performed per the test requirements and test summary stated above. There was no visible damage to the test specimens upon completion of testing.

ISO Certification

Available Upon  
Request

**Prepared by:**

  
Farrah Morones, Environmental Test  
Operations Manager

**Approved By:**

  
Jason Lee, Director of Operations



## Certificate of Test Compliance

**Worked Performed For:**

**Pelican Products**  
23215 Early Ave.  
Tustin, CA 90505

**Job No. 10549****Contract No. N/A****Purchase Order No. 4500227195****Date 10/19/2021**

### Dust (IP6X) Test

**Test Requirements:**

Kelly Space & Technology Inc. certifies that the Case, Part No. 1556 - 23.43" x 13.56" x 10.57" was subjected to Dust IP6X per IEC 60529 (IP6X) Par. 13.4 & 13.6.

**Pre-Conditioning:**

Temperature: 15°C to 35°C  
Humidity: 25% to 75%  
Dust: Talcum Powder  
Dust Concentration: 2 Kg per cubic meter test chamber volume  
Duration: 8 Hours

The testing was completely and correctly performed in accordance with IEC 60529 (IP6X) Par. 13.4 & 13.6. specifications. Complete test results are documented in Kelly Space & Technology, Inc. Test Report No. 10549.

**Test Summary:**

Place the test specimen in a test chamber. Establish a dust concentration of 2 Kg per cubic meter test chamber volume. Expose the test specimen to this dust environment for 8 hours.

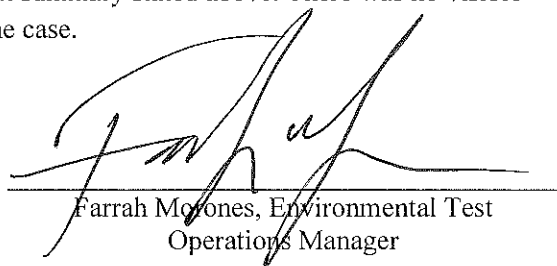
Remove accumulated dust from the specimen by brushing, wiping, shaking, taking care to avoid introducing additional dust to the test item. Do not remove dust by either air blast or vacuum cleaning. Perform visual examination for evidence of damage, penetration, or deterioration.

All testing was performed per the test requirements and test summary stated above. There was no visible evidence of dust penetration or damage was observed to the case.

ISO Certification

Available Upon  
Request

**Prepared by:**

  
Farrah Morones, Environmental Test  
Operations Manager

**Approved By:**

  
Jason Lee, Director of Operations



## Certificate of Test Compliance

**Worked Performed For:**

**Pelican Products**  
23215 Early Ave.  
Tustin, CA 90505

**Job No. 10549**

**Contract No. N/A**

**Purchase Order No. 4500227195**

**Date 9/28/2021**

### Low Temperature Test

**Test Requirements:**

Kelly Space & Technology Inc. certifies that the Case, Part No. 1556 - 23.43" x 13.56" x 10.57" was subjected to Low Temperature per DEF STAN 81-41 Part 3/4 Par. 21.

**Temperature:**  $-51^{\circ}\text{C} \pm 2^{\circ}\text{C}$

**Duration:**  $16 \pm 0.5$  hours after specimen has reached test temperature or 7 days  $\pm 1$  hour if time required for the package to attain the temperature cannot be assessed.

The testing was completely and correctly performed in accordance with DEF STAN 81-41 Part 3/4 Par. 21. specifications. Complete test results are documented in Kelly Space & Technology, Inc. Test Report No. 10549.

**Test Summary:**

Place the test specimen in a test chamber on the face on which it normally is expected to be transported or stored. Install a thermocouple on the test specimen, Decrease the chamber temperature to  $-51^{\circ}\text{C} \pm 2^{\circ}\text{C}$  at a rate not to exceed  $3^{\circ}\text{C}$  per minute. Maintain the chamber at  $-51^{\circ}\text{C} \pm 2^{\circ}\text{C}$  for either:

- 1)  $16 \pm 0.5$  hours after specimen has reached test temperature or
- 2) 7 days  $\pm 1$  hour if time required for the complete package to attain the temperature cannot be assessed.

Return the chamber temperature to ambient conditions at a rate not to exceed  $3^{\circ}\text{C}$  per minute.

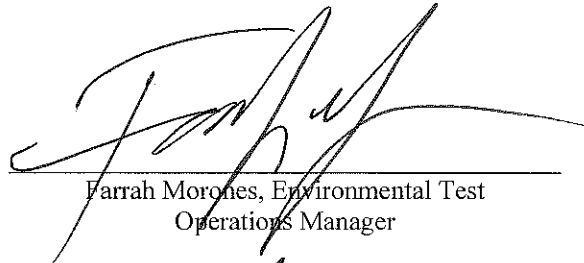
Perform visual examination. The package is considered to have failed if it is unserviceable or is affected in any way which would potentially cause the test specimen to become unserviceable.

All testing was performed per the test requirements and test summary stated above. There was no visible damage to the test specimen upon completion of testing.

ISO Certification


Available Upon  
Request

**Prepared by:**

  
Farrah Morones, Environmental Test  
Operations Manager

**Approved By:**

  
Jason Lee, Director of Operations



## Certificate of Test Compliance

Worked Performed For:  
Pelican Products  
23215 Early Ave.  
Tustin, CA 90505

Job No. 10549  
Contract No. N/A  
Purchase Order No. 4500227195  
Date 8/12/2021

### Vertical Impact Test

#### Test Requirements:

Kelly Space & Technology Inc. certifies that the Case, Part No. 1556 - 23.43" x 13.56" x 10.57" was subjected to Vertical Impact per DEF STAN 81-41 Part 3/4 Par. 19.

#### Pre-Conditioning:

Temperature:  $25^{\circ}\text{C} \pm 10^{\circ}\text{C}$   
Humidity:  $60\% \pm 15\%$   
Duration: 16 hours or until specimen has reached temperature stabilization (whichever is the shortest period)

#### Vertical Impact:

Drop Height:  $39.4" \pm 0.79"$   
Drops: One on each side  
Impact Surface: A solid mass at least 20 times that of the heaviest case and an area sufficiently large to ensures that the case fall entirely upon the surface.

The testing was completely and correctly performed in accordance with DEF STAN 81-41 Part 3/4 Par. 19 specifications. Complete test results are documented in Kelly Space & Technology, Inc. Test Report No. 10549.

#### Test Summary:

Lift the case and hold it at  $39.4" \pm 0.79"$  between the lowest point of the case and at the time of release and the nearest point on the impact surface. Upon completion of the drop, perform a visual inspection and document the results. Repeat one drop for each additional case side.

All testing was performed per the test requirements and test summary stated above. There was no visible damage to the test specimens upon completion of testing other than some scuffing to the case exterior due to impact.


ISO Certification

Available Upon  
Request

Prepared by:

  
Farrah Morones, Environmental Test  
Operations Manager

Approved By:

  
Jason Lee, Director of Operations



## Certificate of Test Compliance

**Worked Performed For:**

Pelican Products  
23215 Early Ave.  
Tustin, CA 90505

**Job No. 10549****Contract No. N/A****Purchase Order No. 4500227195****Date 8/23/2021**

### Vibration Test

**Test Requirements:**

Kelly Space & Technology Inc. certifies that the Case, Part No. 1556 - 23.43" x 13.56" x 10.57" was subjected to Vibration per DEF STAN 81-41 Part 3/4 Par. 24.

**Pre-Conditioning:**

Temperature: 25°C ± 10°C

Humidity: 60% ± 15%

Duration: 16 hours or until specimen has reached temperature stabilization (whichever is the shortest period)

No. of Specimens: Eight (8)

Test Freq.: 5 to 350 Hz

Test Level: Noted Below

Vibration Type: Sinusoidal

Orientations: 3 (Front/Back, Side/Side, Top/Bottom)

The testing was completely and correctly performed in accordance with DEF STAN 81-41 Part 3/4 Par. 24 specifications. Complete test results are documented in Kelly Space & Technology, Inc. Test Report No. 10549.

**Test Summary:**

Install the test specimens to the vibration test setup in the first orientation. Photograph the test setup.

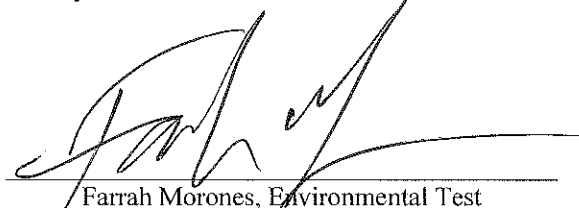
The cases shall be vibrated for 2 hours in each of three mutually perpendicular axes at a vibration amplitude of ( $\pm 6$  mm peak from 5 to 9 Hz) and ( $\pm 2$  g peak from 9 to 350 Hz) and a continuous logarithmic rate of  $0.75 \pm 0.25$  octave per minute. Perform a visual examination and document all results.

All testing was performed per the test requirements and test summary stated above. There was no visible damage to the test specimens upon completion of testing.


ISO Certification

Available Upon  
Request

**Prepared by:**

  
Farrah Morones, Environmental Test  
Operations Manager

**Approved By:**

  
Jason Lee, Director of Operations



## Certificate of Test Compliance

**Worked Performed For:**

**Pelican Products**  
23215 Early Ave.  
Tustin, CA 90505

**Job No.** 10549

**Contract No.** N/A

**Purchase Order No.** 4500227195

**Date** 8/25/2021

### Water Immersion IPX7 Test

**Test Requirements:**

Kelly Space & Technology Inc. certifies that the Case, Part No. 1556 - 23.43" x 13.56" x 10.57" was subjected to Immersion IPX7 per IEC 60529 (IPX7) Par. 14.2.7.

**Water Level:**

Test specimens with a height less than 850 mm (33.46 inches) has the lowest point of the test specimen 1000 mm (39.37 inches) below the surface of the water. Test specimens with the height equal to or greater than 850 mm (33.46 inches) has the highest point of the test specimen 150 mm (3.9 inches) below the surface of the water.

**Water Temperature:**

Water temperature does not differ from that of the equipment by more than 5 K (9°F)

**Soak Duration:**

30 minutes

The testing was completely and correctly performed in accordance with IEC 60529 (IPX7) Par. 14.2.7 specifications. Complete test results are documented in Kelly Space & Technology, Inc. Test Report No. 10549.

**Test Summary:**

Visually inspect the test specimen. Place the test specimen in a submersion tank. Test specimens with the height less than 850 mm (33.46 inches) has the lowest point of the test specimens 1000 mm (39.37 inches) below the surface of the water. Test specimens with the height equal to or greater than 850 mm (33.46 inches) has the highest point of the test specimens 150 mm (3.9 inches) below the surface of the water.

Verify the water temperature does not differ from that of the test item by more than 5 K (9°F). Allow the test specimen to soak for 30 minutes.

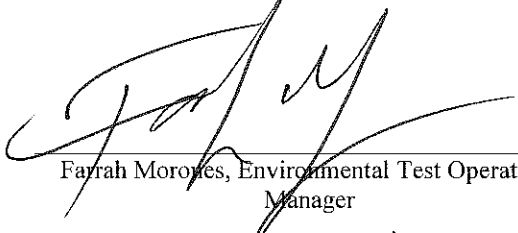
Remove the test specimen from the tank. Perform a visual inspection and check for the presence of water inside the test item. Document all results.

All testing was performed per the test requirements and test summary stated above. There was no visible evidence of water penetration or damage was observed to the case.


ISO Certification

Available Upon  
Request

**Prepared by:**

  
Farrah Morones, Environmental Test Operations  
Manager

**Approved By:**

  
Jason Lee, Director of Operations